

LG webOS TV Signage



UN340C (EU/CIS)

Design	Stand Type	2 poles
	Front Color	Ashed Blue
Display	Inch	43"
	Resolution	3,840 × 2,160 (4K Ultra HD)
Speaker		20 W
Broadcasting System	Digital	DVB-T2/C/S2
	Analog	SECAM / PAL



USB Cloning

USB data cloning makes managing multiple displays more efficient for optimal operation. Instead of setting up each display one by one, data can be copied to a USB for one display and can be sent to the other displays through a USB plug-in.

* USB is not provided by LG. FAT32 or NTFS formatting is recommended.



Compatibility with Crestron Control System

The UN340C has Crestron Connected® Certification, a function that is dedicated to meeting room and that meets the growing need in corporate meeting space market.

* It is a network based control system. Available Crestron control system may differ.



On/Off Time Setting

Create your own time scheduler of your Commercial TV. Once you set your preferred time or day, the TV will automatically switch on or off in accordance with that schedule.






External Speaker Out

Enhance the entertainment experience with an additional speaker (sold separately). Guests can listen to the TV audio from other rooms within their suite, not only the room where the TV is located.

* Use only with the 3 pole 3.5 mm stereo jack when connecting external speakers.


▲ COMMON INTERFACE ▲

DIMENSION (unit: mm)

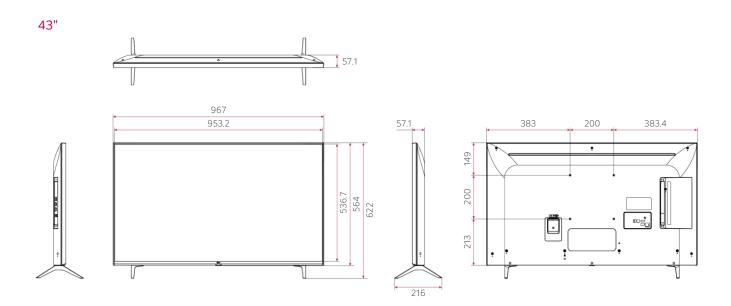

CONNECTIVITY

43"

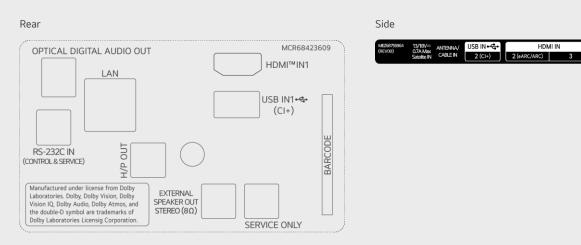

SPECIFICATIONS

43UN340C

Category	Category	Commercial Lite	
	Tool Name	UP8000	
Design	Stand Type	2 poles	
	Front Color	Ashed blue	
Display	Inch	43"	
	Resolution	3,840 × 2,160 (4K Ultra HD)	
	Brightness (Typ.)	300 nit	
Video	HDR 10 Pro / HDR HLG	Yes / Yes	
Audio	Speaker (Audio Output)	20 W	
Broadcasting System	Digital	DVB-T2/C/S2	
	Analog (NTSC / SECAM / PAL)	SECAM / PAL	
Smart Feature	webOS22,	, HDMI-ARC (ARC, HDMI2), Anti-theft System (Kensington Lock)	
Hospitality Feature	USB Cloning, WOL, SNMP, Diagnostics (Self Diagnostics (USB)), HTNG-CEC (1.4), Simplink (HDMI-CEC (1.4)), Multi IR Code, PDM, Welcome Video, Welcome Screen (Splash Image), Insert Image, USB Auto Playback, Lock Mode (Limited), RJP (Remote Jack Pack) Compatibility, Energy Saving Mode		
Vertical Function (Corporate/Retail)	Crestron Certi. Compatibility, DPM (Digital Power Management), Time Scheduler, NTP Sync Timer		
Software Compatibility	SuperSign Control		
Connectivity	Set Side	HDMI In (3), USB (2.0), RF In	
	Set Rear / Bottom	Digital Audio Out (Optical), RJ45 (Usage Purpose (LAN)), RS-232C (Phone Jack), LG SVC Only (Phone Jack Type)	
Dimension -	VESA Compatible	200 × 200 mm	
	$W \times H \times D$ / Weight (without Stand)	967 × 564 × 57.1 mm / 8.8 kg	
	W × H × D / Weight (with Stand)	967 × 622 × 216 mm / 8.9 kg	
	W × H × D / Weight (In Shipping)	1,055 × 660 × 142 mm / 11 kg	
	On Bezel Width (L/R/U/B)	12.8 / 12.8 / 12.8 / 19.9 mm	
	Off Bezel Width (L/R/U/B)	6.9 / 6.9 / 6.9 / 18.4 mm	
Power	Power Supply (Voltage, Hz)	AC 100-240 V, 50-60 Hz	
	Power Consumption (Typ. / Max.)	TBD / TBD	
	Standby Power Consumption	Under 0.5 W	
Standard -	Safety	CB / CU TR	
	EMC	CE	
Standard (EU_Old Label (~`21.3))	ErP Class	A++	
	On Power Consumption	TBD	
	Luminance Ratio (%)	65%	
	Average Annual Consumption (kWh)	TBD	
Standard (EU_New Label (`21.3~))	SDR Grade	G	
	SDR On Mode	TBD	
	HDR Grade	G	
	HDR On Mode	TBD	
Accessory	Remote Type (L-Con), Power Cable (1.8 m / Straight Type)		
	Total of the state		

^{*} Specifications are subject to change without notice. Please make sure to check the product manual for details about product usage.





