

DUAL DISPLAY SOLUTION

D



SOLUM SMART SIGNAGE



SOLUM

SOLUM SMART SIGNAGE

DUAL SIGNAGE SOLUTION

SOLUM

D

DUAL DISPLAY SOLUTION FEATURE



Design & Performance

- Slim Depth : 25.4 mm
- Narrow Bezel for Signage Concept
- Differential Brightness : 400 & 800 cd/M²
- Long Life Reliability : 24 Hour / 7 Days
- Android O/S

Simple Installation

- Support to Hanging Type Install
- Simple Design for Use Case
- Support to Design Customized Option

Compatible network interface

- Ethernet & Wi-Fi 2.4 GHz
- Support to USB 2.0

Special Feature for customer

- Built in Launcher for Compatibility
- Support API for Customer CMS

SPECIFICATION

49"DUAL (D49A)



DISPLAY

Size	49" (Dual)
Resolution	1,920(H) x 1,080(V)
W*H Ratio	1.77 (16:9)
Luminance	A : 400 cd/m ² / B : 800 cd/m ²
Portrait Mode	Portrait Only (Landscape X)
Contrast Ratio	1000:1
Viewing Angle (H/V)	178° / 178°
Response Time	8 ms
Active Area	1,074(H) x 604(V) mm
Color Gamut	72%
Backlight type	E-LED
Life Time (LED)	50,000 Hrs

ADDITIONAL FUNCTIONS

Speaker	10 W + 10 W
Touch	No

ENVIRONMENTAL

Operating Temperature	0-40°C, 32-104°F
Operating Humidity	10-80%
Storage Temperature	-20-60°C, -4-140°F
Warranty	3 Years (US/EU/JA)

SYSTEM

OS	Android 11
CPU	Arm Cortex-A55 Quad core
GPU	ARM G52 2EE
RAM	2 GB DDR3
Storage (ROM)	16 GB eMMC
Network	Ethernet RJ45 / WiFi 2.4 GHz (1T1R)
Connectivity	USB 2.0 x 2 ea
Remote Control	Yes
HDMI / DP	No(Inside only)


MECHANICAL

SET Outline Dimensions	1340 x 659.6 x 25.4 mm
VESA	No
SET Weight	24 kg / 52.9 lbs
Packing Outline Dimensions	1505 x 810 x 191 mm
Packing Weight	33 kg / 72.7 lbs
Bezel Width (U/L/R/D mm)	12.5 / 12.5 / 12.5 / 12.5

POWER REQUIREMENTS

Power Consumption	210 W (Max)
Standby Power	≤ 2 W
Power Source	100-240Vac / SMPS

55"DUAL (D55A)

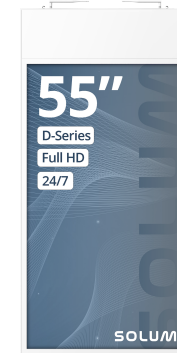

DISPLAY

Size	55" Dual
Resolution	1,920(H) x 1,080(V)
W*H Ratio	1.77 (16:9)
Luminance	A : 400 cd/m ² / B : 800 cd/m ²
Portrait Mode	Portrait Only (Landscape X)
Contrast Ratio	1000:1
Viewing Angle (H/V)	178° / 178°
Response Time	8 ms
Active Area	1,209(H) x 680.4(V) mm
Color Gamut	72%
Backlight type	E-LED
Life Time (LED)	50,000 Hrs

ADDITIONAL FUNCTIONS

Speaker	10 W + 10 W
Touch	No

ENVIRONMENTAL

Operating Temperature	0-40°C, 32-104°F
Operating Humidity	10-80%
Storage Temperature	-20-60°C, -4-140°F
Warranty	3 Years (US/EU/JA)

SYSTEM

OS	Android 11
CPU	Arm Cortex-A55 Quad core
GPU	ARM G52 2EE
RAM	2 GB DDR3
Storage (ROM)	16 GB eMMC
Network	Ethernet RJ45 / WiFi 2.4 GHz (1T1R)
Connectivity	USB 2.0 x 2 ea
Remote Control	Yes
HDMI / DP	No(Inside only)

MECHANICAL

SET Outline Dimensions	1478.5 x 739 x 25.7 mm
VESA	No
SET Weight	29 kg / 63.9 lbs
Packing Outline Dimensions	1640 x 940 x 200 mm
Packing Weight	40 kg / 88.2 lbs
Bezel Width (U/L/R/D mm)	12.5 / 12.5 / 12.5 / 12.5

POWER REQUIREMENTS

Power Consumption	230 W (Max)
Standby Power	≤ 2 W
Power Source	100-240 Vac / SMPS

SOLUM

www.solum-group.com

Frankfurter Str. 10-14
65760 Eschborn, Germany